

Fioré Micro


 Usage instructions

Fioré Micro

F1008S-200-CC

LED - 2.2K - 3K switchable
2.2W - DC3.7V - IP65

8 cm
3.15 in

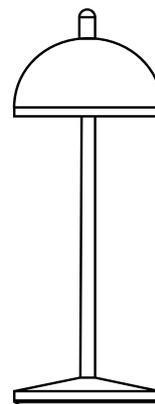

20 cm
7.85 in

Product Description

Model F1008S-200-CC	Application Rechargeable table light	Net Weight 420g	Dimensions φ8 x 20cm	Inner box 12 x 9 x 24cm	Outer carton 38 x 38 x 26cm	Pcs/Ctn 6
Input voltage DC3.7V	Power 2.2W	Safety class CLASS III	Ingress Protection IP65	Beam angle 100°	Light source SMD	Luminaire flux 160 lm
Materials Die-casting aluminum alloy, clear polycarbonate diffuser w optical structure						

How to use

This product is made exclusively for lighting purposes.

(A) It must not be exposed to heavy mechanical loads or contamination; (B) Please install and use only after thorough check that it is undamaged; (C) Any installation or maintenance must be carried out while the product is turned off; (D) Any alterations to the product, tampering with the product, or failure to comply with the instructions may harm the product and make it hazardous; (E) When fully assembled, the lamp (not including the charging base), reaches an IP65 rating making it ideal for outdoor use. When assembled fully and on top of the charging base it has an IP20 rating which means it is not suitable for outdoor use; (F) All metal and plastic surfaces should be cleaned with a soft dry cloth; (G) LAMPA☼ shall not be held liable for any damage caused due to its products being assembled in any manner that does not comply with these instructions.

Battery charger technical data


- ☼ Contact charging base : INPUT/OUTPUT 5Vdc -1A; cavo USB 1.2 Mt.
- ☼ Charger: INPUT AC100-240V 50/60Hz; OUTPUT 5Vdc -1A.
- ☼ This lamp works well also when connected to the charging base.
- ☼ It is advised that only the original provided charging base is used. Alternatively, 1A max chargers can be used.

Important to know

- ☼ The lamps supporting surface should not exceed 15° of tilt or it will fall.
- ☼ The provided battery has an overload protection function.
- ☼ To preserve the integrity of this battery, we recommend keeping the charging to 20% minimum to 80% maximum; if the lamp is not used regularly it is advised to regularly charge/discharge it.
- ☼ Please refer to local laws at your place of living (where the lamp is used) for proper disposal / recycling of the battery.


TOUCH ON/OFF

Memory of brightness.
Every time switch on the lamp, the lighting brightness is the same as the previous setting.

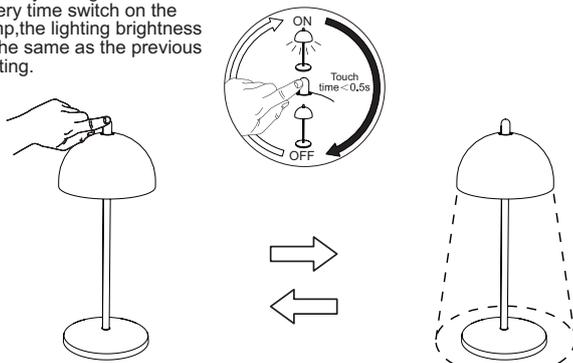


STEPLESS DIMMER

⚠ ONLY WORKS WHEN THE LIGHT IS ON


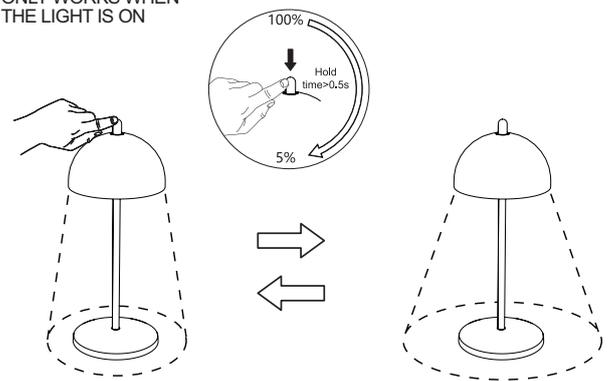


CCT SWITCH


⚠ ONLY WORKS WHEN THE LIGHT IS OFF

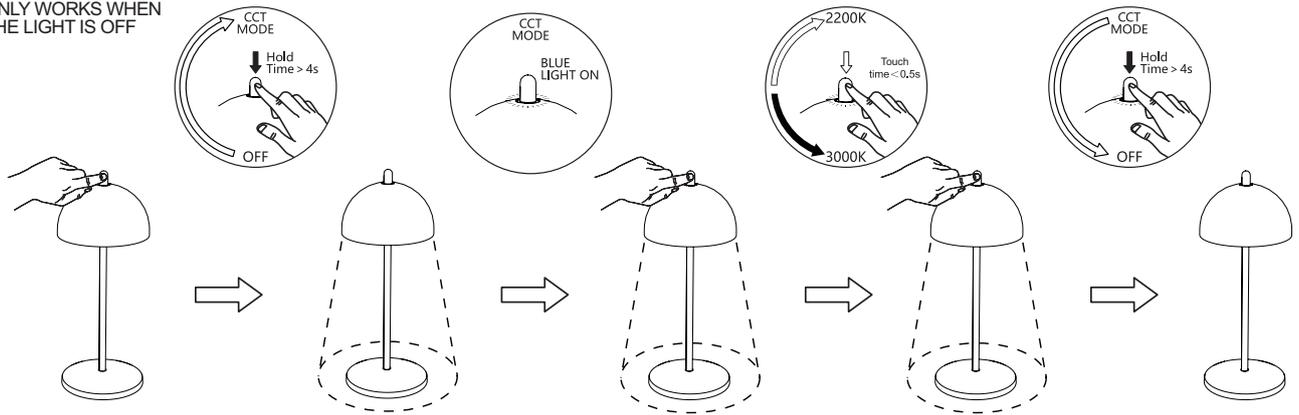

If there is no operation within 10 seconds, the lamp will automatically quit from the colour temperature switching mode.

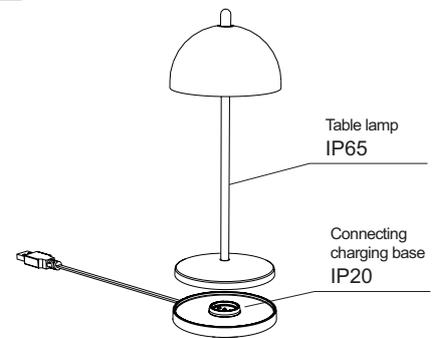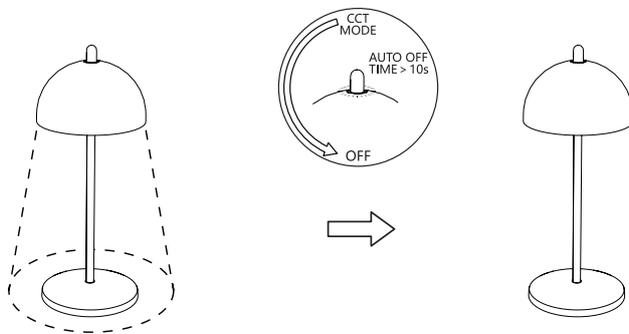

CHARGE

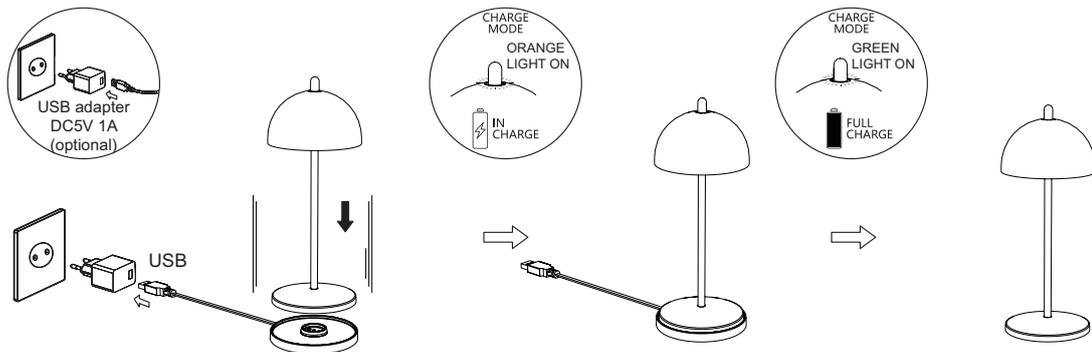

Included accessories

Single contact charging station


Replacement battery pack

Replacement LED board


INPUT: 5Vdc max 1A, OUTPUT: 5Vdc max 1A

Scan the QR code to see how to exchange a battery pack for your lamp.


Scan the QR code to see how to exchange the LED board for your lamp




Legend



LED source replaceable
by qualified personnel



Battery replaceable by
qualified personnel



Driver replaceable by
qualified personnel

QR
CODE



SCAN ME

Rechargeable battery maintenance

All rechargeable batteries are subject to some level of wear and tear when used.

The life of batteries, which in most cases can be used to be charged for up to 450 times, may be reduced by the following:

- (A) Incorrect recharging mode - the lamp must be recharged when it is flat (about 10% of its remaining power)
- (B) When left unused for a long period of time
- (C) When left on a live recharging base for a long period of time, even if the lamp is fully charged
- (D) When non-original accessories are used for recharging
- (E) When the lamp is exposed to very high/low temperatures



LAMPA 
THE FREEDOM TO HOST

QR
CODE



SCAN ME

Design by Lampa Lights, for everyone.

 info@lampalights.com

 +972 774605025

 www.lampalights.com